

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number
WO 2004/045351 A1

(51) International Patent Classification⁷: **A47J 31/46**

(21) International Application Number:
PCT/IT2002/000725

(22) International Filing Date:
15 November 2002 (15.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **RHEA VENDORS S.P.A.** [IT/IT]; Via Valleggio, 2bis, I-22100 Como (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DOGLIONI MAJER, Andrea** [IT/IT]; Via Vincenzo Monti, 57, I-20145 Milano (IT).

(74) Agents: **SIMINO, Massimo et al.**; Perani Mezzanotte & Partners, Piazza San Babila, 5, I-20122 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **LIQUID SUPPLYING APPARATUS FOR VENDING MACHINE**

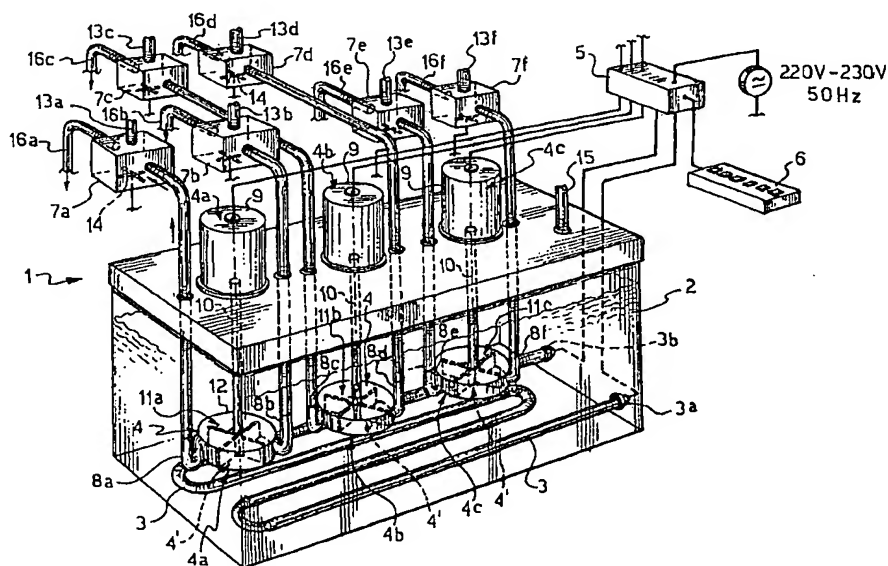

(57) Abstract: The present invention relates to a device for supplying liquids comprising heating elements (3) heating up said liquids and an electric drive pumping group (101). The characteristic is that the pumping group (101) comprises an intake (102) and at least a first and second intake duct (8a-8b, 8c-8d, 8e-8f), and is further equipped with an impeller (11a, ..., 11c), said first and second intake duct (8a-8b, 8c-8d, 8e-8f) being selectively activated according to the direction of rotation of said impeller (11a, ..., 11c) of the pumping group (4a, ..., 4c).

WO 2004/045351 A1

BEST AVAILABLE COPY